




## Series ALLMOVE ASH

Peristaltic Pump for high pressure application, PN 16

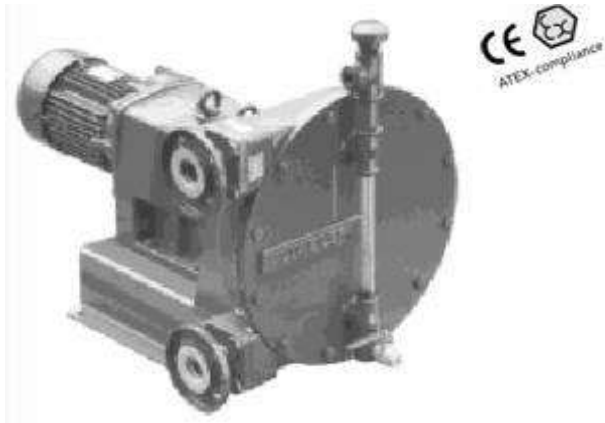

### Pumped liquid

Low to highly viscous liquids, pasty, neutral or aggressive, pure or abrasive, gaseous or tending to froth, also with fibrous and solids content

### Main fields of application

Sewage and environmental engineering, chemical and petrochemical industries, food and beverages industry, paper and pulp industry, marine and offshore engineering, agriculture

### Performance data Series ALLMOVE ASH

Capacity	Q	up to 60	m <sup>3</sup> /h
avail. suc.-pressure	ps	up to -0,95	bar
Discharge pressure	pd	up to 16	bar
Differential pressure	pdiff	up to 16	bar
Viscosity	v	up to 100000	mm <sup>2</sup> /s
Fluid temperature	t	up to 80	°C
Permissible solid content	-	up to 50	vol %
Grain size	gr	up to 33	mm

### Construction features

- Base plate design (pump and motor mounted on a base plate)
- Pedestal mounting
- Dry installation
- Pump drive directly coupled or by gear or belt transmission
- Horizontal installation
- Self - priming
- Dry Self - priming

- Reversible pumping
- Sealingless and valveless